


# SOLID 1

Quality mono amplifier

• Small size  
Easy integration in a vehicle

• Aluminum chassis  
High thermal dissipation

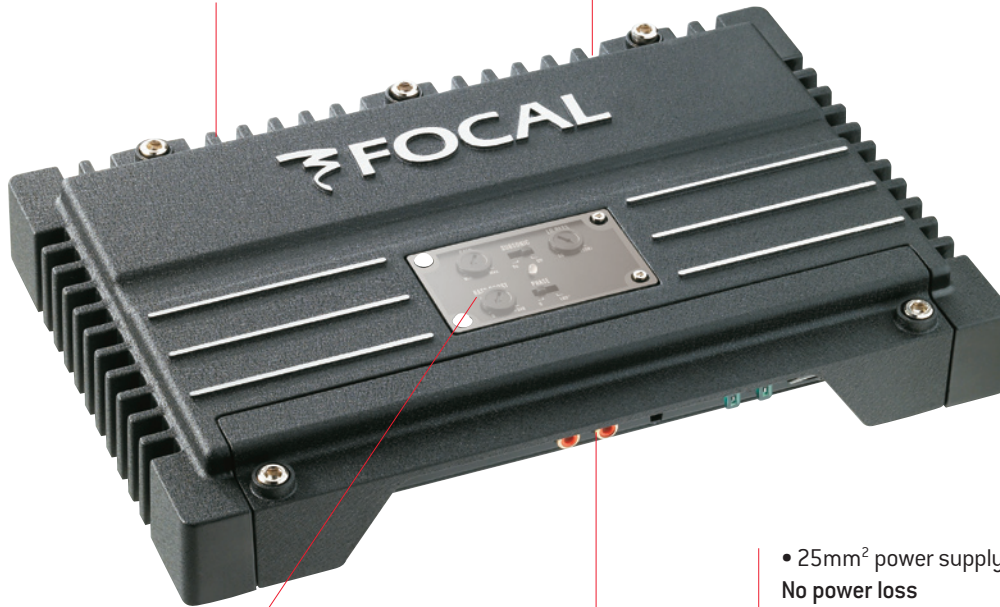

• Remote control  
Keep the control



• Subsonic and low-pass crossover  
Numerous settings available

- 25mm<sup>2</sup> power supply terminal  
No power loss
- "Auto Power On" on the high-level input  
Easy wiring
- High and low-level inputs  
Suits any installation
- High safety  
Protection against any electrical damages
- Balanced inputs  
Floating ground, no parasite nor other noises

## Technical characteristics:

Power under 4 Ohms: 1x300W  
Power under 2 Ohms: 1x470W  
Power under 1 Ohm: 1x600W (SPL mode)  
Signal/noise ratio: >85dB (A)  
Bass Boost: 0 to +9dB  
Adaptable phase: 0 or 180°  
Adjustable gain  
Dimensions (HxLxD): 45x300x200mm  
Protections: Short-circuit, continuous current, thermal overload



## It makes the difference:

- A SPL mode: 600W under 1 Ohm
- High-level input, fits the original system
- Very small size according to the power supplied
- Aluminum chassis
- Remote control

