


# SOLID 4

Quality 4 channel amplifier

- Small size  
Easy integration in a vehicle

- Aluminum chassis  
High thermal dissipation

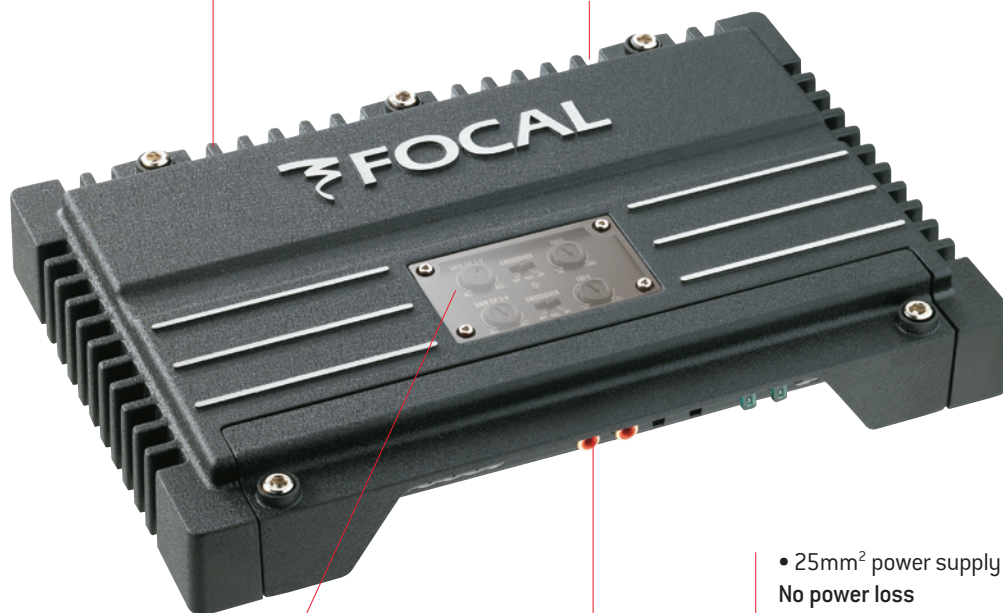

- Remote control  
Keep the control



- High-pass and low-pass crossover  
Numerous settings available

- 25mm<sup>2</sup> power supply terminal  
No power loss
- High and low-level inputs  
Suits any installation
- "Auto Power On" on the high-level input  
Easy wiring
- Fader  
Benefit from the 4 channels while using only 2 RCA
- Balanced inputs  
Floating ground, no parasite nor other noises

## Technical characteristics:

Power under 4 Ohms: 4x75W  
Power under 2 Ohms: 4x100W  
Bridged mode under 4 Ohms: 2x200W  
Frequency response: 10 Hz–60kHz  
Signal/noise ratio: >80dB (A)  
Adjustable gain  
Dimensions (HxLxD): 45x300x200mm  
Protections: Short-circuit, continuous current,  
thermal overload



## It makes the difference:

- Self-bridging of channels 3 and 4
- High-level input, fits the original system
- Secure and easily accessible settings
- Aluminum chassis
- Remote control

